

# BANISH™

MULTI-CALIBER SUPPRESSORS





**BANISH™ Suppressors are the original multi-caliber suppressor and have been setting the standard for modular suppressor design since 2009. As “the one that fits any gun,” BANISH Suppressors are more than just a multi-caliber suppressor, they are also packed full of innovative design features that BANISH both sound and recoil.**

BANISH Suppressors has always had one overriding goal in mind - to make the most user-friendly suppressor on the market. And what is more user-friendly than being multi-caliber and user-serviceable? At BANISH Suppressors, we are proud of what we've accomplished, and we want to share with you what makes a BANISH Suppressor stand out from the crowd.

Our unique WhisperTech™ tube is where the BANISH multi-caliber system starts, with a lightweight titanium alloy tube. BANISH Suppressors are light-weight and tough enough for a lifetime of service. The internal baffles handle the gas in such a way that the suppressor significantly reduces recoil as well as sound. Cleaning your can isn't a problem with our CanClean™ technology, making this one of the fastest cleaning suppressors on the market.



## WARNING

To provide for your safety and the effective use of this silencer, it is important that the owner and any user of the silencer read this entire manual and strictly follow the warnings and instructions within. This silencer should be used only by those who are well-versed in the safe operation of firearms.

Failure to follow installation and maintenance instructions in this manual may result in serious personal injury and damage to the firearm.

Suppressed firearms make less noise than unsuppressed firearms and it is easy to forget that they are still capable of causing bodily injury and property damage. Remember, a suppressed firearm should be treated with the same safety and caution as an unsuppressed firearm.

Before installing the silencer, be sure that the firearm is unloaded and the action is opened and visibly clear of any ammunition. If you are at all unsure as to the proper procedures to ensure that your firearm is unloaded, please consult your firearm user's manual/instructions and/or contact a properly licensed dealer or the manufacturer of your firearm.

Firearm silencers are user-attached firearm muzzle devices, and as such are subject to improper attachment issues unless the procedures outlined in this manual are followed precisely.

Check the fit between your barrel and silencer before firing! The thread mount must be fully shouldered on the barrel. There should be no visible gap between the barrel shoulder and the face of the silencer thread mount (*crush washer from muzzle brake must be removed*).

If there is any gap DO NOT fire the host with the silencer attached. Poor accuracy and product damage may result if the silencer is not seated against thread shoulder.

Silencers must be free of obstructions such as mud, dirt, etc. DO NOT attempt to shoot through an obstructed silencer.

The silencer is designed to suppress the initial muzzle blast and subsequent projectile de-corking pressure. The silencer doesn't contact or otherwise interact with the bullet, allowing the projectile to travel at its default speed.

A sonic crack may be produced by the projectile as it breaks the sound barrier. This is solely a function of the projectile breaking the sound barrier and is not related to product performance.

To ensure your silencer remains secure while firing, it is of the utmost importance that you frequently verify the silencer is securely tightened onto the barrel. We recommend checking the security of the attachment after 30 discharges of the firearm.

Before removing the silencer from the host firearm, be sure that the firearm is unloaded and the action is opened so that it is visibly clear of any ammunition. When removing the silencer, use extreme caution as it may be hot to the touch after firing. Use a Devour™ suppressor cover (sold separately) or gloves to avoid burns or other injuries.

Once the silencer is removed from the host firearm, BANISH recommends using a thread protector or other muzzle device to protect the muzzle threads and crown during storage or transport.

## CALIBERS & RESTRICTIONS

.45 ACP

.40 S & W

10 mm

9 mm

.380 ACP

.22 LR

Rimfire

300 BLK (subsonic only)

Full auto rated

**User-serviceable**

## DIAMETER

1-3/8"

## WEIGHT

9.6 oz (compact)

11 oz (extended)

## LENGTH

6-11/16" (compact)

8-5/8" (extended)

## BAFFLES

8 (compact)

12 (extended)

## MATERIALS

Titanium & Aluminum



The BANISH 45 was specifically designed for handguns and will fit calibers from .45 ACP to rimfire. Testing shows that the BANISH 45 is able to suppress a 9mm pistol an amazing 36 decibels, far more sound reduction than the competition.

The BANISH 45 is the lightest in its class at a mere 9.6 ounces in the compact configuration. Ideal for 3-gun or target shooting, the BANISH 45 will help protect the hearing of the shooter and others in a shooting competition and reduce recoil for quicker second shot target acquisition.

The Banish 45 comes as a 8-5/8" suppressor holding 12 STifle™ baffles, yet for tighter shooting platforms can easily break down and assemble into a 6-11/16" configuration with only eight baffles.

Perfect for the range, and also a plus for competition and home defense, the Banish 45 will significantly reduce the report and recoil of your handgun.

This multi-caliber, user serviceable and modular design makes it the one to fit any handgun.

**BANISH**<sup>™</sup>  
**45**





## INSTALLATION OF SUPPRESSOR

Always ensure the firearm is unloaded when attaching or removing suppressor. After confirming that your firearm is unloaded, place the threaded end of the BANISH 45 in line with the threads of the barrel.

Ensure the threads on the barrel and suppressor are clean and undamaged, screw the suppressor onto the barrel threads until the suppressor firmly seats against shoulder.


**Take special care to avoid cross-threading** as damage to the suppressor and barrel threads will result, as well as misalignment of the suppressor with the bore of the firearm.

This may result in a potential baffle strike that could cause serious personal injury and damage to both the firearm and suppressor. Since direct thread mounted suppressors can loosen or unscrew during firing, **it is extremely important that the operator frequently checks that the silencer remains securely threaded to the barrel.**

Please note, the suppressor will be very hot during and after firing. Wait until the suppressor cools or use a heat resistant fabric to retighten.

Hand tighten only. Ready for use.

ITEM NO.	PART NO.	QTY.
A	END CAP	1
B	BAFFLE - BLUE	2
C	BAFFLE - RED	2
D	BAFFLE - BLACK	8
E	EXTENSION TUBE	1
F	O-RING H70-025*	1
G	MAIN TUBE	1
H	PISTON HOUSING	1
I	.578 PISTON	1
J	BUFFER SPRING	1
K	O-RING H70-018*	1
L	PISTON CAP	1

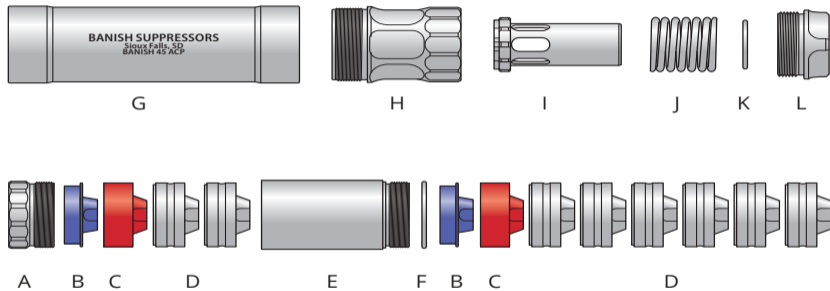

*\*Note: Don't remove O-Rings, part listed for replacement needs only.*

## DISASSEMBLY AND CLEANING

It is recommended that the suppressor be cleaned every 250 - 500 rounds fired, more often (every 100) with rimfire ammunition.

To disassemble make sure the firearm is unloaded and remove from host firearm.

Unscrew piston cap (L) and remove piston (I) and spring (J).

Unscrew end cap (A), piston housing (H), and extension tube (E) from the main tube (G). Note: Blue baffles are press-fit into the extension tube and end cap, and should not be removed.


Using your solvent of choice, spray the inside of both tubes and let soak before removing baffles.

Place the tubes on a soft wood block and tap baffles out of the main tube (G) and the extension tube (E) using a wooden dowel and small hammer.

Use a stiff bristle brush (brass or nylon) with solvent / carbon killer of choice to clean the baffles and inside the tube.

Make sure all parts are clean and solvent has been removed.

ITEM NO.	PART NO.	QTY.
A	END CAP	1
B	BAFFLE - BLUE	2
C	BAFFLE - RED	2
D	BAFFLE - BLACK	8
E	EXTENSION TUBE	1
F	O-RING H70-025*	1
G	MAIN TUBE	1
H	PISTON HOUSING	1
I	.578 PISTON	1
J	BUFFER SPRING	1
K	O-RING H70-018*	1
L	PISTON CAP	1

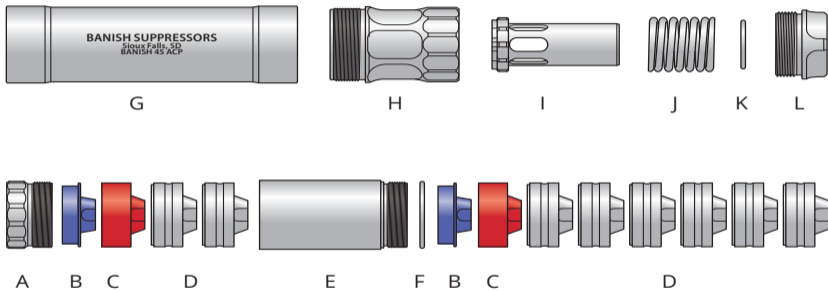

*\*Note: Don't remove o-rings, part listed for replacement needs only.*

## ASSEMBLY - Full Length

Place the spring (J) over the piston (I) and slide into the piston housing (H), ensure the end of the piston fits in the gear shaft. Then attach the piston cap (L). Apply anti-seize to interior threads of the main tube.

Hold the main tube (G) with the engraved text as you would read it (not upside down) and thread the piston assembly into the main tube (G). The piston assembly will be on the right side as shown in the diagram on the opposite side of this page.

Using a flat surface, stack six black baffles on top of one red baffle. Each of the black baffles (D) and red baffles (C) have exterior witness lines and small alignment features machined into the end of the baffle to maintain exhaust port alignment.

Ensure each baffle is lined up and the index tabs are engaged.


Place the main tube (G) with attached piston assembly over the baffle stack, slide the tube to the edge of a surface and flip it to the other end (use your finger to hold the baffles in place).

Thread the extension tube (E) into the assembled main tube. Note: The blue baffle (B) is press-fit into the extension tube (E), (do not remove).


Stack two black baffles (D) on top of one red baffle (C). Place the assembled tube over the baffle stack, slide the tube to the edge of a surface and flip it to the other end (use your finger to hold the baffles in place) and attach the end cap. Note: One blue baffle (B) is press-fit into the end cap (A), (do not remove).

Hand tighten. Ready for use.

ITEM NO.	PART NO.	QTY.
A	END CAP	1
B	BAFFLE - BLUE*	2
C	BAFFLE - RED*	2
D	BAFFLE - BLACK*	8
E	EXTENSION TUBE*	1
F	O-RING H70-025*	1
G	MAIN TUBE	1
H	PISTON HOUSING	1
I	.578 PISTON	1
J	BUFFER SPRING	1
K	O-RING H70-018*	1
L	PISTON CAP	1



*\*Note: the extension tube with the press-fit blue baffle, one red baffle, and two black baffles are not used in the compact setup.*



*\*Note: Don't remove o-rings, part listed for replacement needs only.*

## **ASSEMBLY - Compact**

From full length assembly, simply remove the end cap (A) and extension tube (E) from the main tube and reattach the end cap directly to the main tube.

**To assemble from take-down** - Place the spring (J) over the piston (I) and slide into the piston housing (H), ensure the end of the piston fits in the gear shaft. Then reattach the piston cap (L). Apply anti-seize to interior threads of the main tube.

Hold the main tube (G) with the engraved text as you would read it (not upside down) and thread the piston assembly into the main tube (G). The piston assembly will be on the right side as shown in the diagram on the opposite side of this page.

Using a flat surface, stack six black baffles on top of one red baffle. Each of the black baffles (D) and red baffles (C) have exterior witness lines and small alignment features machined into the end of the baffle to maintain exhaust port alignment.

Ensure each baffle is lined up and the index tabs are engaged.

Place the main tube (G) with attached piston assembly over the baffle stack, slide the tube to the edge of a surface and flip it to the other end (use your finger to hold the baffles in place).

Attach the end cap. Note: One blue baffle (B) is press-fit into the end cap (A), (do not remove).

Hand tighten. Ready for use.

## **BANISH™ Suppressor Lifetime Warranty**

We provide a lifetime warranty against all manufacturing defects and damages caused by the normal use of our products. We will repair or replace free of charge any suppressor manufactured by, or at the direction of, BANISH™ Suppressors. The product is sold “as is” with no further implied contractual rights or warranties beyond those expressly stated herein.

The lifetime warranty does not apply to certain conditions or acts. It is at the sole discretion and determination of BANISH™ Suppressors if a defect or condition is covered by this warranty. Conditions not covered include, but are not limited to: modifications, abuse, neglect, use of defective ammunition, use of improperly sized ammunition, and criminal conduct. BANISH™ Suppressors assumes no liability for damages or bodily injury caused by such acts or omissions as previously described. Abuse and neglect are defined as usage outside of

the reasonable scope for which the product is intended, thus contributing to the accelerated and unreasonable premature wear of the suppressor itself.

If a repair is required, the owner must contact our Customer Service Department. Our customer service representative will arrange for return of the suppressor at manufacturer's shipping expense. PLEASE DO NOT SHIP THE SUPPRESSOR FOR REPAIR WITHOUT FIRST CONTACTING CUSTOMER SERVICE AND DO NOT SHIP IN ANY EVENT WITHOUT A COPY OF THE APPROVED BATFE FORM.

When you ship the suppressor back to the manufacturer, please include a detailed statement concerning the type of defect or malfunction encountered, describe the ammunition used and type of host weapon the product was used on or attached to.



If for any reason your suppressor is not eligible for repair or replacement, you may purchase a replacement suppressor for 50% off the MSRP for a same or similar suppressor.

Please contact our Customer Service Department at 888-781-8778 for further details and requirements.

**banishsuppressors.com**  
**7511 S Louise Ave**

**888-781-8778**  
**Sioux Falls, SD 57108**

## **THE BANISH™ BETTER SUPPRESSOR GUARANTEE**

BANISH Suppressors already ship with an ironclad warranty against defects in manufacturing. But they also ship with a guarantee of satisfaction and performance. If your BANISH Suppressor doesn't significantly reduce the report and recoil of your firearm, we'll buy it back - No Questions Asked.

If your BANISH™ Suppressor doesn't significantly reduce the report of your firearm, as well as recoil, we'll buy it back within 30 days - no questions asked! After your Form 4 is approved, you may return your suppressor to BANISH™ for a full refund in the form of a Gift Certificate (tax stamp not included). All returns must be within 30 days of your Form 4 approval date.

Visit [banishsuppressors.com](http://banishsuppressors.com) for guarantee details.

# BANISH™

MULTI-CALIBER SUPPRESSORS



[banishsuppressors.com](http://banishsuppressors.com)

7511 S Louise Ave

Sioux Falls, SD 57108

888-781-8778